

Removing and Replacing the *radiosport* Foam Microphone Sock

Using a small #00 Phillips Screw Driver. The same to be used to loosen and tighten the Microphone contact Set Screws.



Slip the Screwdriver shank under the O-Ring Sock Retainer



Slide the Screwdriver up to the handle as shown and lift the O-Ring away from the Mic Sock



Carefully, while pulling the O-Ring out, wind it on to the Mic Boom. Don't try to pull it off over the Mic.



Now you can slip the Mic Sock off to exchange Mic elements or to replace a worn Mic Sock.

Reinstalling the Mic Sock will be the reverse procedure.


Reinstalling a new Mic sock



As before slide the shank of the #00 Philips screwdriver under the Mic sock and up to the Handle.




You will now **wind** the O-Ring back over the Mic Sock.

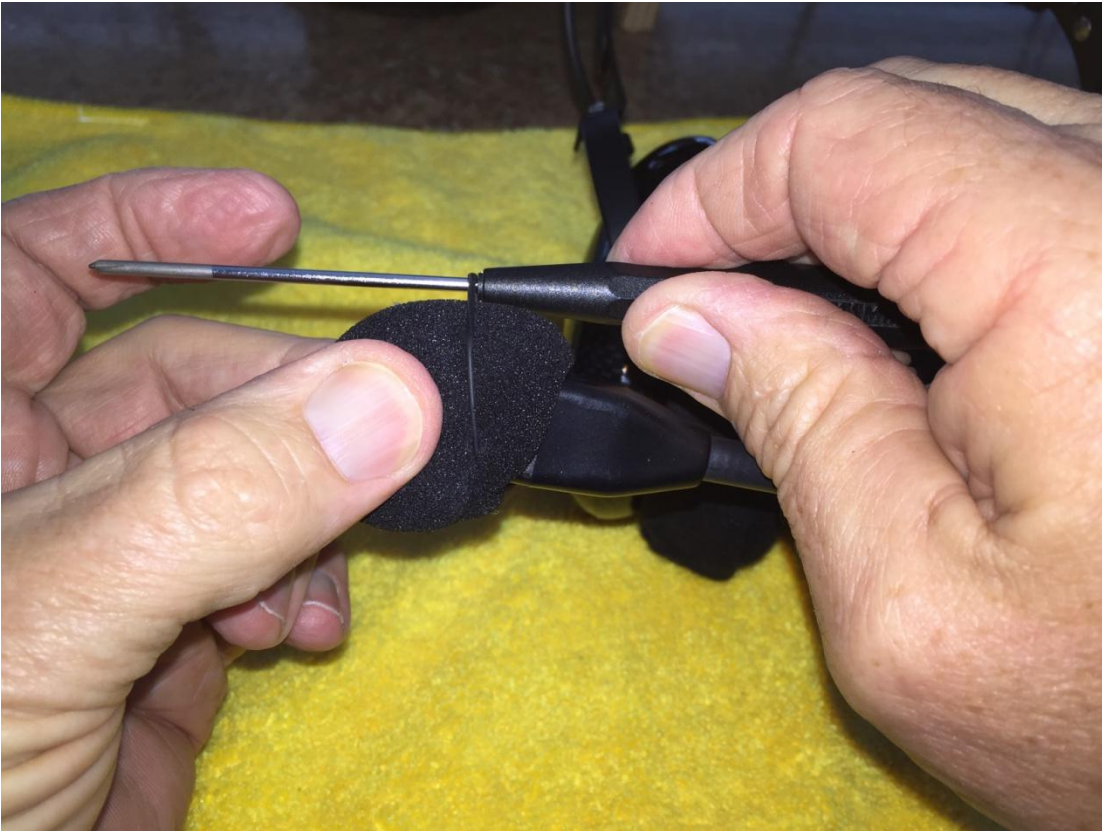

Just keep **winding** the O-Ring over the Mic Sock until it is in position at the base of the Mic Element.



This is far enough to hold the Mic sock in place even in demanding conditions.

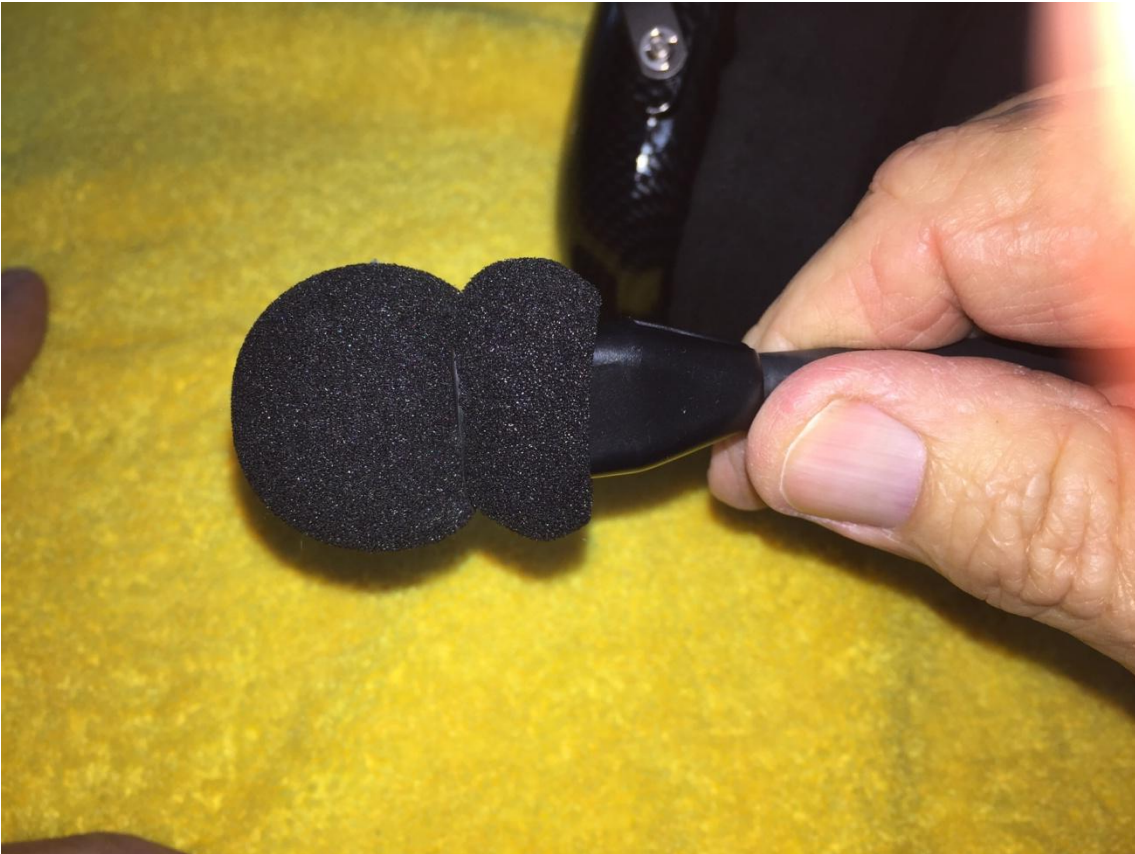

Fully installed it should look like this. If you need to even it out you may do so by grasping a large portion of the corner and pulling out over the sharp corner of the Mic holder to get it aligned. If you don't grasp enough of the Foam Mic Sock doing this final step you can pull a tiny piece off, so use care.